


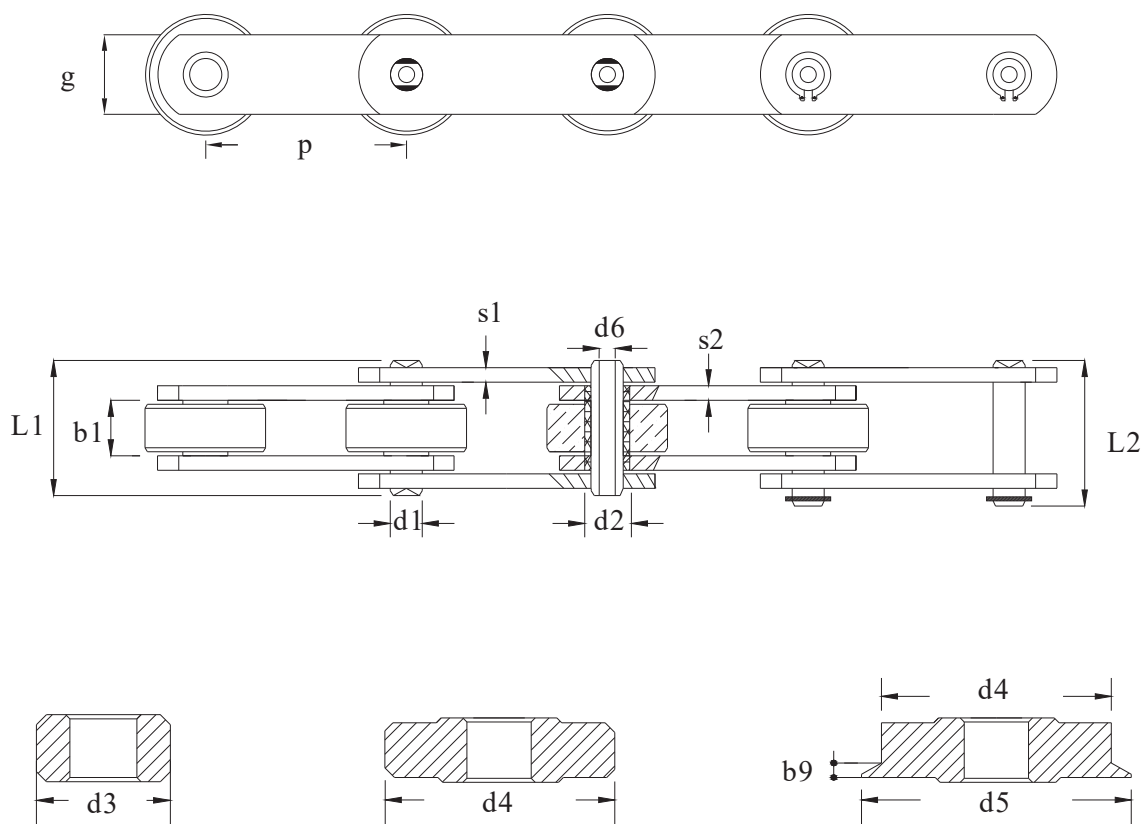

| CHAIN<br>No | PITCH |       |       |       |       |       |       | Width Between<br>Inner Plates |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------------------------------|
|             | P     |       |       |       |       |       |       | b1                            |
|             | mm    |       |       |       |       |       |       | mm                            |
| E20HP       | 38,1  | 50,8  | 63,5  | 76,2  | 88,9  | 101,6 |       | 11,70                         |
| E30HP       | 50,8  | 63,5  | 76,2  | 88,9  | 101,6 | 127,0 | 152,4 | 15,20                         |
| E40HP       | 76,2  | 88,9  | 101,6 | 127,0 | 152,4 | 203,2 |       | 19,05                         |
| E50HP       | 101,6 | 127,0 | 152,4 | 203,2 | 254,0 |       |       | 25,40                         |
| E60HP       | 127,0 | 152,4 | 203,2 | 254,0 | 304,8 |       |       | 38,10                         |

| CHAIN<br>No | Roller<br>Ø | Flanged Roller<br>Ø |      | Pin<br>Length |    | Pin<br>Ø |       | Bush<br>Ø | Plate<br>Depth | Plate<br>Thickness |     | Ultimate Tensile<br>Strength |        |
|-------------|-------------|---------------------|------|---------------|----|----------|-------|-----------|----------------|--------------------|-----|------------------------------|--------|
|             | d3          | d4                  | b9   | L1            | L2 | d1       | d6    | d2        | g              | s1                 | s2  | Q                            | **Q    |
|             | mm          | mm                  | mm   | mm            | mm | mm       | mm    | mm        | mm             | mm                 | mm  | kg                           | kg     |
| E20HP       | 25,40       |                     |      | 26            | 30 | 8,35     | 6,50  | 11,80     | 21             | 2,5                | 2,5 | 1.600                        | 2.800  |
| E30HP       | 31,75       | 31,75/40            | 5,0  | 36            | 40 | 14,00    | 10,20 | 18,00     | 25             | 4,0                | 4,0 | 2.800                        | 5.000  |
| E40HP       | 47,50       | 47,50/60            | 5,8  | 44            | 48 | 19,00    | 13,30 | 23,70     | 40             | 4,0                | 5,0 | 6.500                        | 12.000 |
| E50HP       | 66,70       | 66,70/82            | 8,0  | 56            | 60 | 26,90    | 19,05 | 32,00     | 50             | 5,0                | 7,0 | 10.000                       | 20.000 |
| E60HP       | 88,90       | 88,90/114           | 10,0 | 80            | 85 | 32,20    | 22,50 | 38,00     | 60             | 8,0                | 9,0 | 16.800                       | 29.000 |

\*\* Q Carico di rottura maggiorato con piastre trattate.

\*\* Q Higher breaking load with hardened plates.