



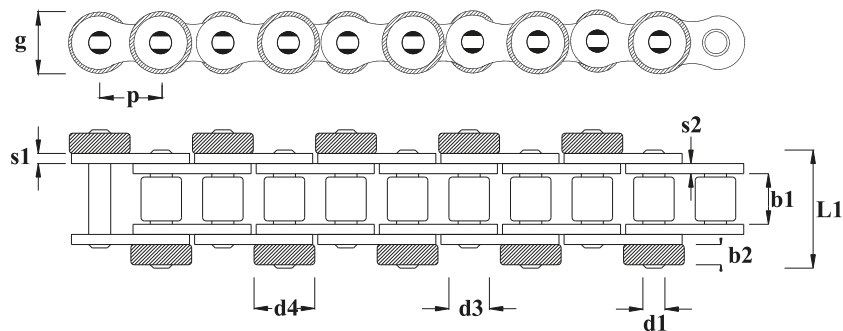


OUR CODE	Pitch	Width Between Inner Plates	Roller Ø	Free Roller Ø	Free Roller Space	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Ultimate Tensile Strength
	p	b1	d3	d4	b2	L1	d1	g	s1/s2	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
C06B1AR	9,525	5,72	6,35	☆	☆	☆	3,28	8,20	1,30	900
C08B1AR	12,700	7,75	8,51	☆	☆	☆	4,45	11,80	1,60	1.800
C10B1AR	15,875	9,65	10,16	☆	☆	☆	5,08	14,70	1,70	2.200
C12B1AR	19,050	11,68	12,07	☆	☆	☆	5,72	16,00	1,85	2.900
C16B1AR	25,400	17,02	15,88	☆	☆	☆	8,28	21,00	3 / 4	6.000

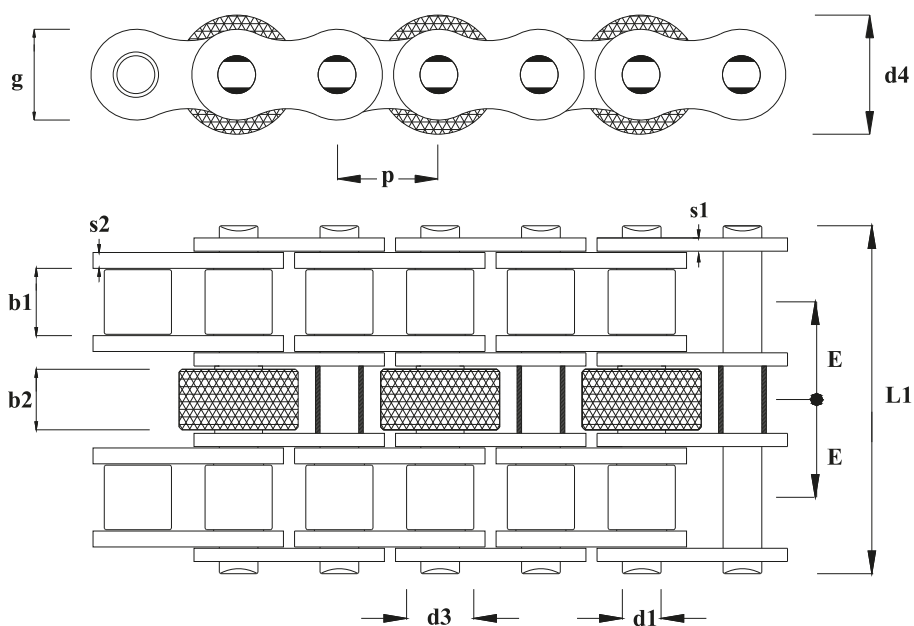




OUR CODE	Pitch	Width Between Inner Plates	Free Roller Space	Roller Ø	Free Roller Ø	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Transversal Pitch	Ultimate Tensile Strength
	p	b1	b2	d3	d4	L1	d1	g	s1/s2	E	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
C06B3AC**	9,525	5,72	9,00	6,35	12,00	34,00	3,28	8,20	1,30	10,24	1.850
C08B3AC**	12,700	7,75	13,50	8,51	17,00	45,00	4,45	11,80	1,60	13,92	3.350
C10B3AC**	15,875	9,65	16,30	10,16	23,00	53,80	5,08	14,70	1,70	16,59	5.000
C12B3AC**	19,050	11,68	18,60	12,07	28,00	62,00	5,72	16,00	1,85	19,46	5.900
C16B3AC**	25,400	17,02	31,50	15,88	35,00	99,70	8,28	21,00	3/4	31,88	12.000

☆ A richiesta. / ☆ According to request.


** Rullo folle montato su bussola. / ** Free roller is assembled on the bush.

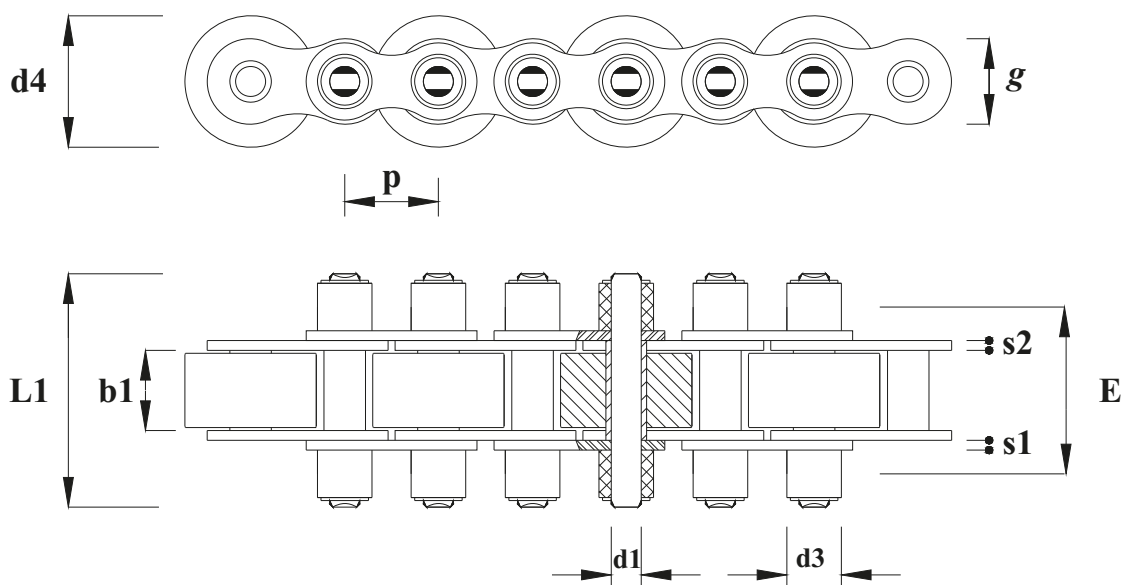

OUR CODE	Pitch	Width Between Inn. Plates	Outer Roller Ø	Free Roller Ø	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Transversal Pitch	Ultimate Tensile Strength	Weight Per Meter
	p	b1	d3	d4	L1	d1	g	s1/s2	E	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
C08B1ER	12,700	7,75	8,51	17,00	30,00	4,45	11,80	1,60	20,40	1.800	1,50
C12B1ER	19,050	11,68	12,07	24,00	48,00	5,72	16,00	1,85	31,50	3.050	3,00
C12B1ERB	19,050	11,68	12,07	26,00	42,50	5,72	16,00	1,85	29,50	3.050	2,90
C16B1ER	25,400	17,02	15,88	38,00	68,00	8,28	21,00	3/4	45,00	6.000	7,00

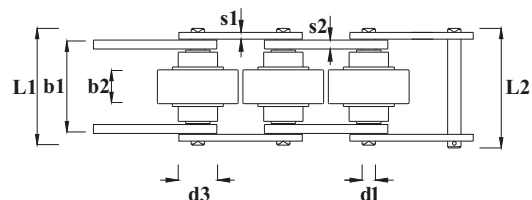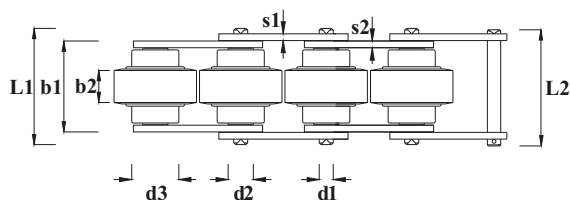



T1







T2

OUR CODE	Pitch	Width Between Inn. Plates	Roller Ø	Free Roller Ø	Free Roller Thickness	Pin Length		Pin Ø	Bush Ø	Plate Depth	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
	p	b1	d3	d4	b2	L1	L2	d1	d2	g	s1/s2	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
CP50.8SBP _{T1}	50,800	47,00	28,00	49,00	20,00	69,00	72-T1	8,28	11,00	26,00	4/4	4.500	3,20
CP38.1SBP _{T2}	38,100	38,00	17,60	36,00	20,00	57,00	59-T2	5,94		17,00	3/4	2.000	2,90
CP38.1SBP1 _{T2}	38,100	33,00	22,50	36,00	15,00	52,00	54-T2	5,94		17,00	3/4	2.000	2,90

d3/d4 Rullo in plastica.
d3/d4 Plastic roller.

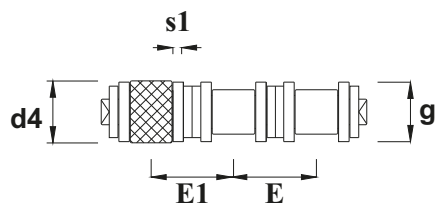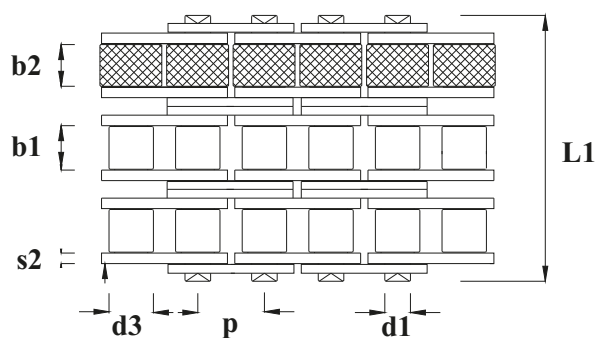

OUR CODE	Pitch	Width Between Inn. Plates	Free Roller Space	Roller Ø	Free Roller Ø	Pin Length	Plate Depth	Transversal Pitch	Horizontal Pitches	Thickness		Ultimate Tensile Strength
	p	b1	*b2	d3	d4	L1	g	E	E1	s1	s2	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
C10B3EAC	15,875	9,65	10,00	10,16	16,00	53,60	14,40	16,59	16,70	1,65	1,65	6.500
C12B3EAC	19,050	11,68	11,00	12,07	18,00	61,50	16,60	19,46	18,40	1,80	1,80	7.800
C16B3EAC	25,400	17,02	16,50	15,88	22,00	99,80	21,00	31,88	30,80	4,00	3,00	12.000

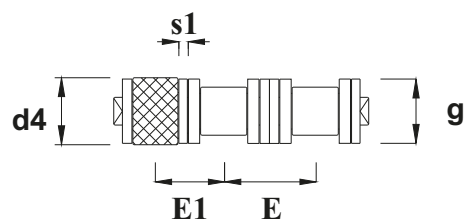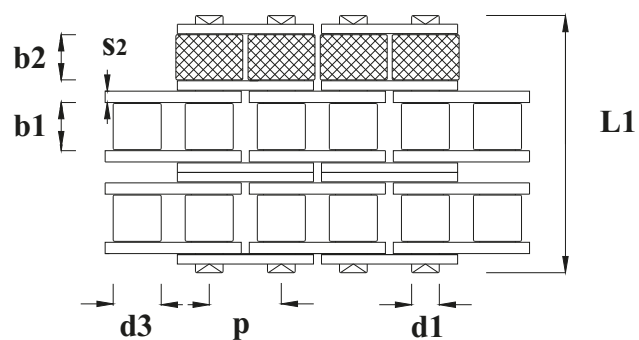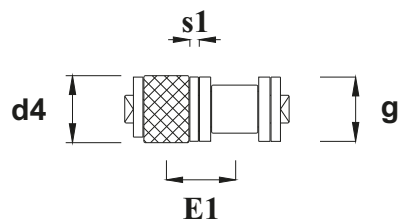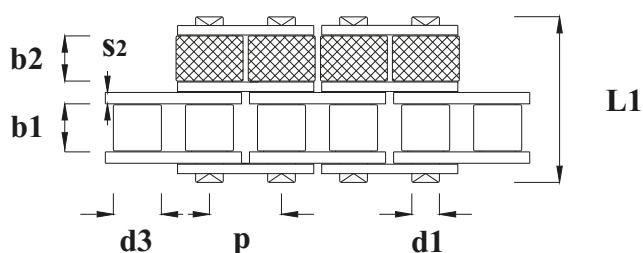

OUR CODE	Pitch	Width Between Inn. Plates	Free Roller Space	Roller Ø	Free Roller Ø	Pin Length	Plate Depth	Transversal Pitch	Horizontal Pitches	Thickness		Ultimate Tensile Strength
	p	b1	☆b2	d3	☆d4	L1	g	E	☆E1	s1	s2	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
C12B1EAR	19,050	11,68	10,00	12,07	18,00	32,60	16,60		14,40	1,80	1,80	3.000
C16B1EAR	25,400	17,02	15,00	15,88	22,00	53,50	21,00		23,00	4,00	3,00	6.000
C12B2EAR	19,050	11,68	10,00	12,07	18,00	53,00	16,60	19,46	14,40	1,80	1,80	7.000
C16B2EAR	25,400	17,02	15,00	15,88	22,00	84,50	21,00	31,88	23,00	4,00	3,00	12.000

☆ A richiesta.
☆ According to request.