




TYPE 1

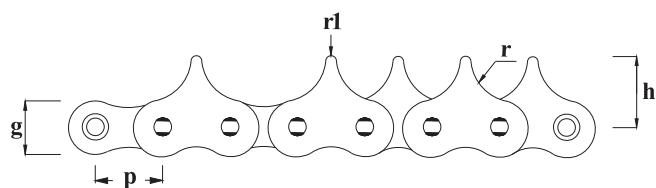


TYPE 2

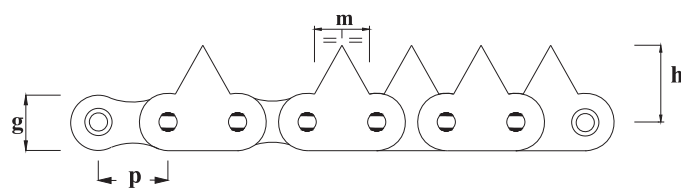

TYPE 3

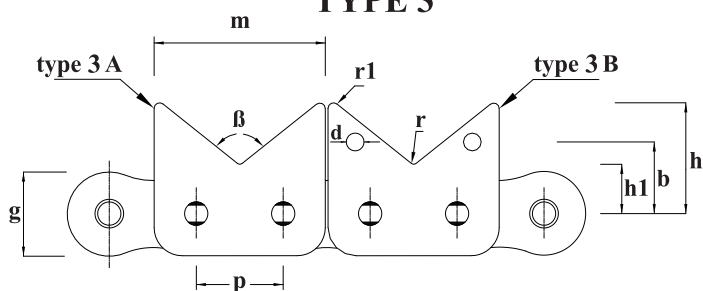



TYPE 4

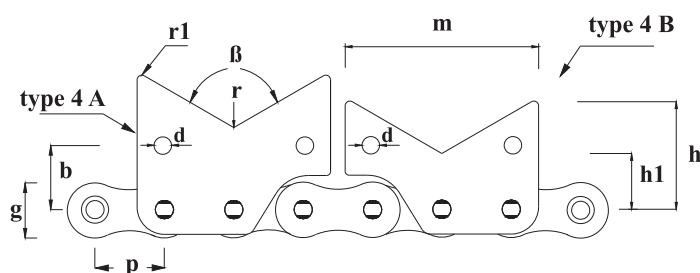




OUR CODE	Type	Pitch	Roller Ø	Width Between Inn. Plates	Pin Ø	Pin Length	Plate Depth	Plate Thickness	ATTACHMENT								Ultimate Tensile Strength	Weight Per Meter
		p	d3	b1	d1	L1	g	s1/s2	h	h1	b	d	m	r	r1	β	Q	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	kg	kg/mt
081/227.04	3A	12,70	7,75	3,30	3,66	10,20	10,00	1,00	14,90	5,15			24,35	4,10	0,50	100	820	0,35
083/232.04	3A	12,70	7,75	4,88	3,94	12,90	10,30	1,30	18,75	9,00			24,35	4,30	0,40	100	1.200	0,50
083/233.04	3A	12,70	7,75	4,88	3,94	12,90	10,30	1,30	14,90	5,15			24,35	4,10	0,50	100	1.200	0,50
083/019.22	3B	12,70	7,75	4,88	3,94	12,90	10,30	1,30	14,80	5,10	8,80	3,00	25,00	4,10	0,50	100	1.200	0,50
08B1/237.04	3A	12,70	8,51	7,75	4,45	16,70	11,80	1,50	14,90	5,15			24,35	4,10	0,50	100	1.800	0,85
08B1/007.06	4A*	12,70	8,51	7,75	4,45	16,70	11,80	1,50	20,40	10,20	11,70	3,20	35,80	5,40	0,90	120	1.800	0,85
08B1/023.06	4A*	12,70	8,51	7,75	4,45	16,70	11,80	1,50	25,60	15,00	11,70	3,20	35,80	5,40	0,90	120	1.800	0,85
10BS/SPC	3A-3B	15,875	10,16	6,45	5,08	16,30	14,70	1,70	☆	☆	☆	☆	☆	☆	☆	☆	2.240	1,10
12B1/235.04	1	19,05	12,07	11,68	5,72	22,50	16,00	1,85	20,00					12,50	1,50		2.900	1,30
16B1/236.04	2	25,40	15,88	17,02	8,28	36,10	21,00	3/4	27,90				20,00				6.000	2,90

☆ A richiesta. / ☆ According to request.

* Esecuzione anche su catena ISO 081 e ISO 083. / * Available also on ISO 081 and ISO 083 roller chain.

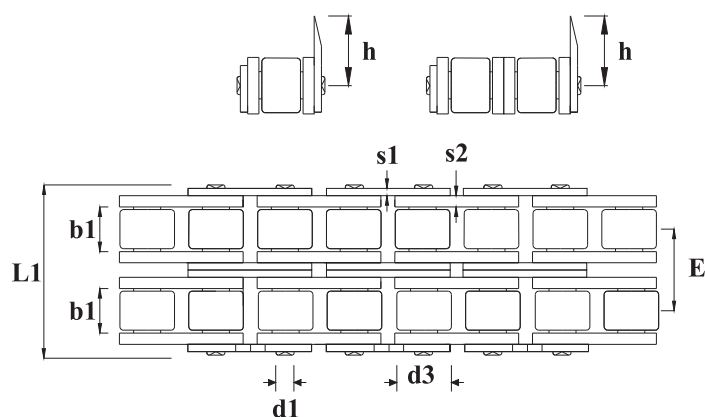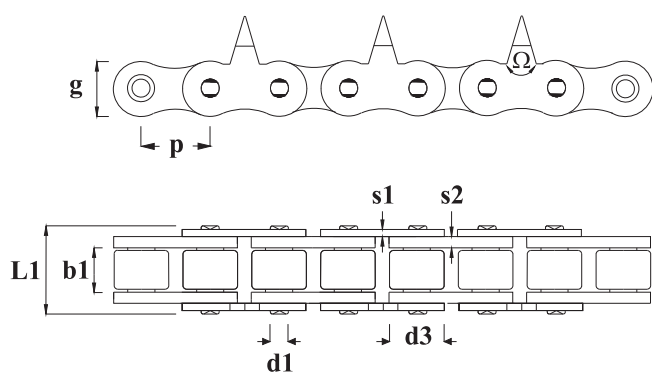

OUR CODE	Pitch	Roller Ø	Width Between Inn. Plates	Pin Ø	Pin Length	Plate Depth	Plate Thickness		ATTACHMENT				Ultimate Tensile Strength
	p	d3	b1	d1	L1	g	s1	s2	h	d4	E	Ω	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	kg
08B1/238.04	12,700	8,51	7,75	4,45	16,7	11,8	1,50	1,60	13,00	-		30	1.800
08B2/239.04	12,700	8,51	7,75	4,45	31,2	11,8	1,50	1,60	13,00	-	13,92	30	3.200
10B2/240.04	15,875	10,16	9,65	5,08	36,1	11,8	1,70	1,70	19,0	-	16,59	30	4.400

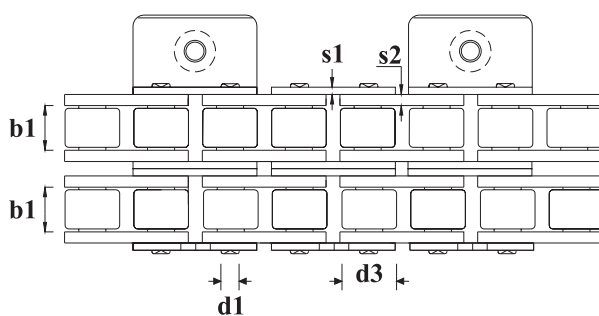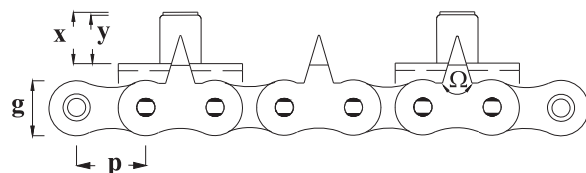

OUR CODE	Pitch	Roller Ø	Width Between Inn. Plates	Pin Ø	Pin Length	Plate Depth	Plate Thickness		ATTACHMENT								Ultimate Tensile Strength
	p	d3	b1	d1	L1	g	s1	s2	h	h1	d4	x	y	E	A	Ω	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	kg
08B2/241.04	12,70	8,510	7,75	4,45	31,2	11,8	1,50	1,60	13,00	8,00	8,51	9,50	7,50	13,92	13,75	30	3.200