


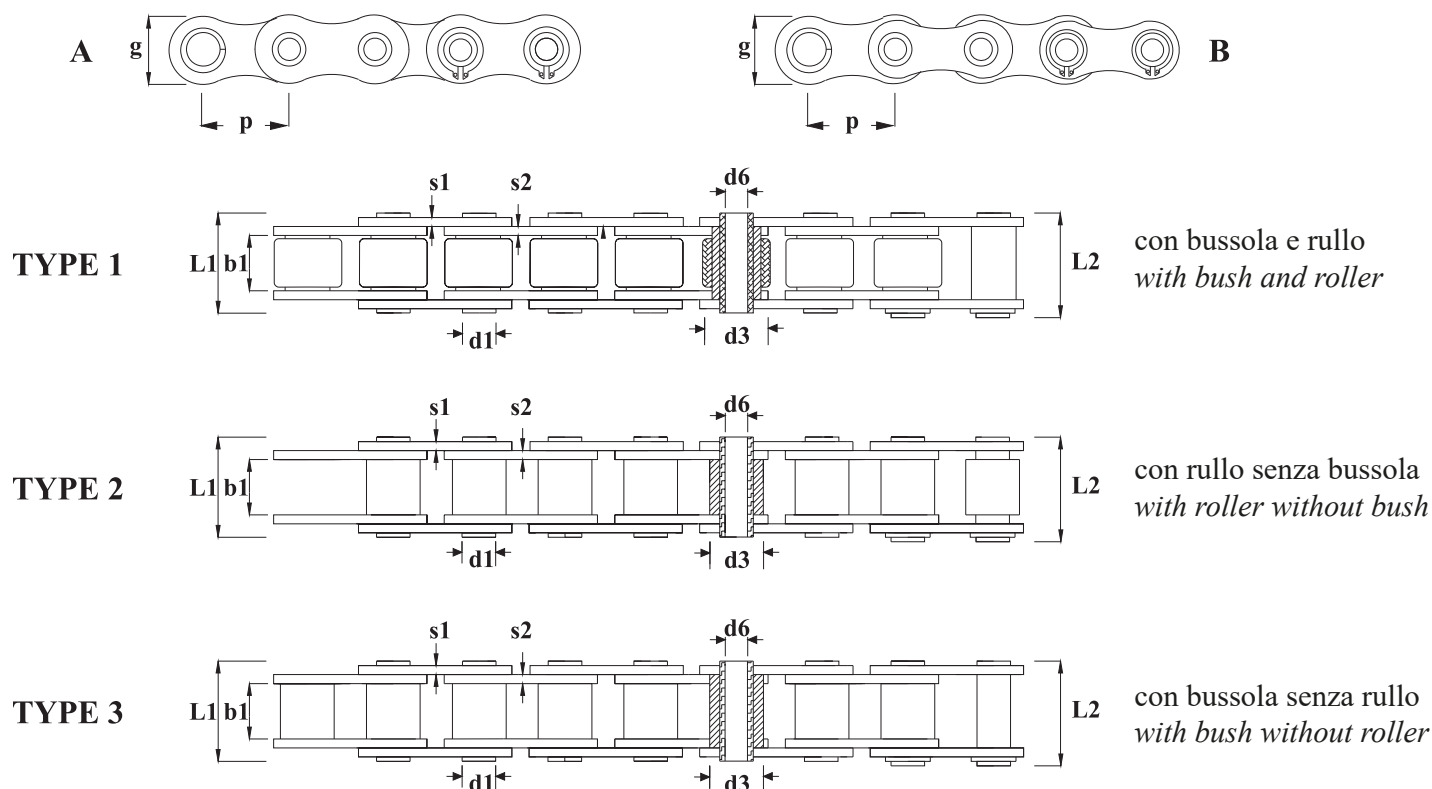

OUR CODE	TYPE	PITCH	Width Between Inner Plates	Roller Ø	Pin Length		Pin Ø		Plate Depth	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
		p	b1	d3	L1	L2	d1	d6	g	s	Q	
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
10B1PF - AT1	1/A	15,875	9,65	10,16	19,30	20,60	5,94	4,04	14,70	1,70	1.700	0,86
12B1PF - AT1	1/A	19,050	11,68	12,07	21,60	22,80	6,50	4,00	16,00	1,85	2.360	1,09
16B1PF - AT1	1/A	25,400	17,02	15,88	34,30	37,80	8,05	5,80	23,20	3/4	4.500	2,34
25PF - BT1	1/B	25,000	12,70	20,00	27,50	29,50	7,85	3,25	18,20	2,50	2.500	1,80
35PF - BT1	1/B	35,000	16,00	20,00	32,00	33,50	14,00	10,20	26,30	3,00	4.000	2,39
38PF - BT1	1/B	38,100	25,40	25,40	53,00	58,00	14,00	10,20	35,00	5/6	7.000	5,96
40PF - BT1	1/B	40,000	10,00	26,00	26,50	28,00	11,40	8,20	24,00	3,00	5.000	2,20
41PF - BT1	1/B	41,750	20,50	17,00	36,00	39,00	11,00	8,20	21,40	3,00	2.800	1,62
508PF - BT1	1/B	50,800	11,00	30,00	27,00	28,30	11,40	8,20	25,50	3,00	6.000	2,10
08B1PF - AT2	2/A	12,700	13,40	8,51	19,00	20,20	6,65	4,10	11,80	1,70	1.400	0,69
10B1PF - AT2	2/A	15,875	10,40	10,16	17,00	18,20	7,05	5,00	14,00	1,85	1.500	0,74
12B1PF - AT2	2/A	19,050	12,00	12,07	22,70	23,90	8,03	5,40	15,80	1,85	2.500	1,09
16B1PF - AT2	2/A	25,40	17,02	15,88	36,30	39,80	11,40	8,20	23,20	4/4	4.500	2,34
08B1PF - AT3	3/A	12,700	7,75	*8,51	16,40	17,60	6,55	4,50	11,80	1,3/1,6	1.100	0,56
10B1PF - AT3	3/A	15,870	9,65	*10,16	19,50	20,50	7,02	5,13	14,70	1,70	1.000	0,86
12B1PF - AT3	3/A	19,050	11,68	*12,07			8,09	6,00	16,00	1,85	1.400	0,82
16B1PF - AT3	3/A	25,400	17,02	*15,88	35,30	37,00	11,50	8,20	23,20	3/4	4.500	2,26
ASA 50PF - BT3	3/B	15,875	9,53	*10,16	19,70	22,30	7,03	5,16	15,00	2,00	1.800	0,91
ASA 60PF - BT3	3/B	19,050	12,70	*11,91	26,00	28,40	8,33	5,97	17,5	2,40	1.800	1,32
ASA 80PF - BT3	3/B	25,400	15,88	*15,88	35,00	38,60	11,15	7,97	24,00	3,25	5.000	2,40

* Catena con bussola senza rullo. Il diam. esterno (d3) è il diam. della bussola. / * Bushing chain without roller. The external diameter (d3) is the diameter of the bush.

** Catena non standard. / ** Not standard chain.