
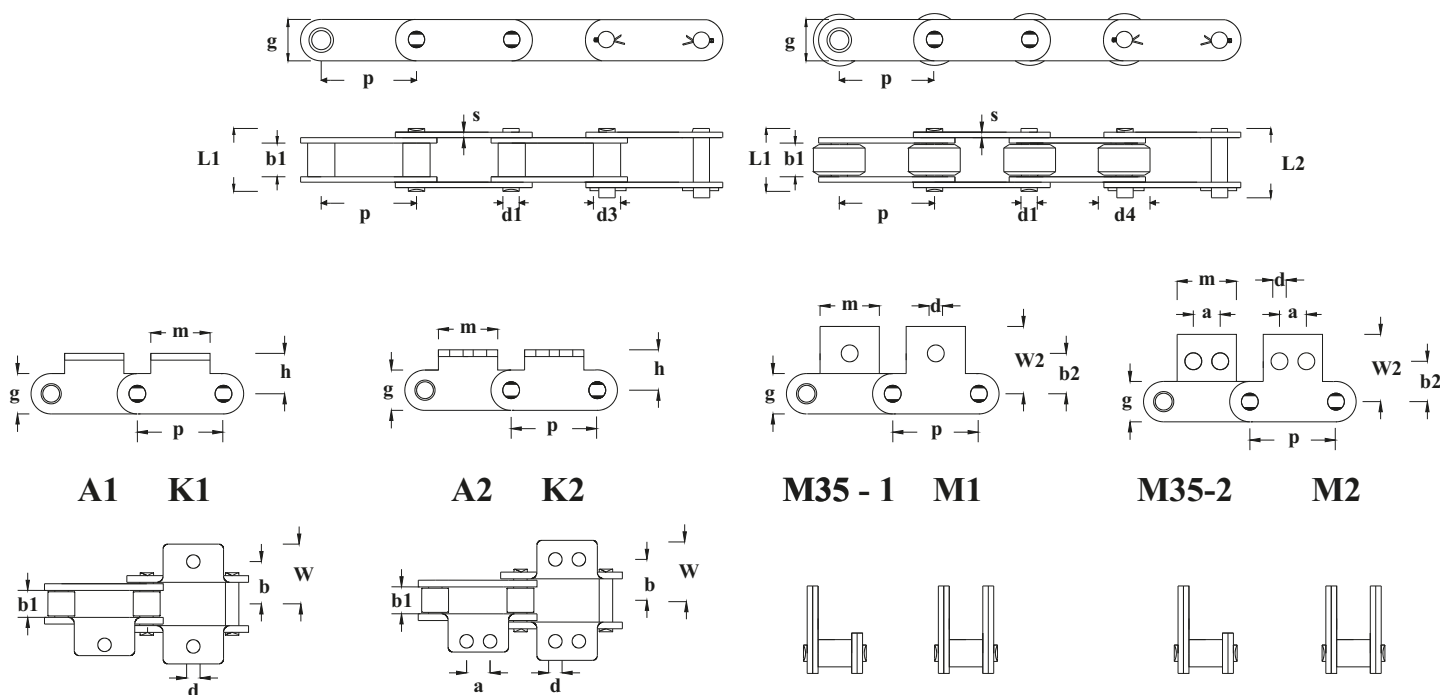
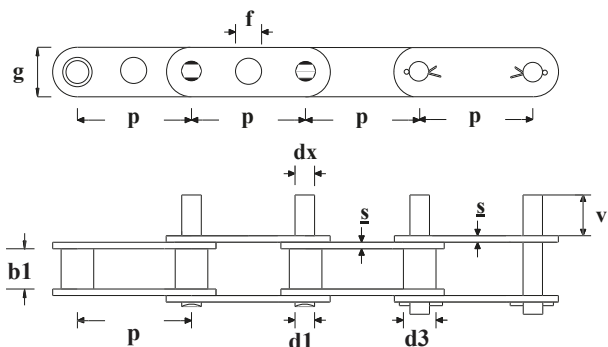
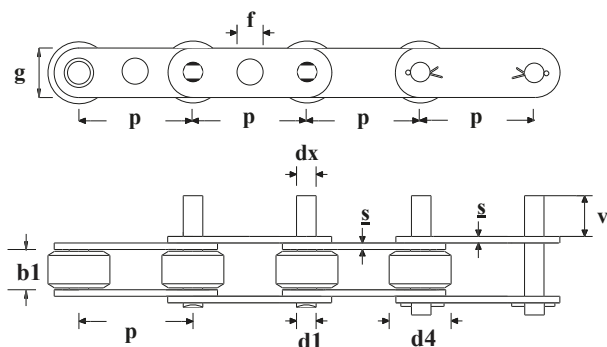
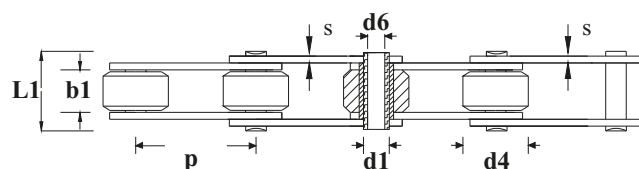


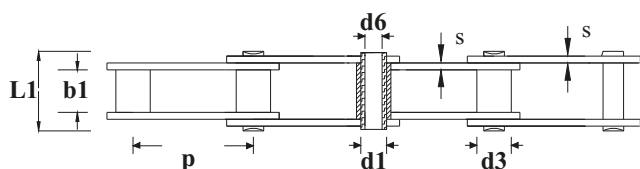

OUR CODE	ANSI CHAIN No	Pitch	Width Between Inner Plates	Roller Ø	Pin Length		Pin Ø	Plate Depth	Plate Thickness	Attachment A1 - A2 - K1 - K2 M35/1 - M35-2/M1 - M2								Ultimate Tensile Strength	Weight Per Meter
		p	b1	d3	L1	L2	d1	g	s	h	d	m	a	b	b2	W	W2	Q	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/mt
C208 A	C2040	25,400	7,85	7,95	16,60	18,20	3,96	12,00	1,50	9,1	4,3	20,0	9,5	12,7	16,0	20,4	21,2	1.750	0,50
C210 A	C2050	31,750	9,40	10,16	20,70	22,50	5,08	15,00	2,00	11,0	5,3	25,0	9,6	15,9	16,0	28,5	29,0	2.230	0,78
C212 A	C2060	38,100	12,57	11,91	25,90	28,50	5,94	18,00	2,50	14,7	6,6	28,0	14,3	21,5	20,7	33,6	35,1	3.180	1,12
C212 AH	C2060H	38,100	12,57	11,91	29,20	31,50	5,94	18,00	3,25	14,7	6,6	28,0	14,3	21,5	20,7	33,6	35,1	3.800	1,44
C216 A	C2080	50,800	15,75	15,88	32,70	35,00	7,92	24,00	3,25	19,0	6,8	38,0	19,0	28,0	27,5	40,5	41,6	5.670	2,08
C216 AH	C2080H	50,800	15,75	15,88	36,20	39,50	7,92	24,00	4,00	19,0	6,8	38,0	19,0	28,0	27,5	40,5	41,6	6.600	2,54
C220 A	C2100	63,500	18,90	19,05	40,40	45,00	9,53	30,00	4,00	23,4	8,8	47,5	23,8	33,3	31,8	49,2	50,0	8.850	3,01
C220 AH	C2100H	63,500	18,90	19,05	43,60	46,50	9,53	30,00	5,00	23,4	8,8	47,5	23,8	33,3	31,8	49,2	50,0	10.900	3,56
				d4															
				mm															
C208 AL	C2042	25,400	7,85	15,88	16,60	18,20	3,96	12,00	1,50	9,1	4,3	20,0	9,5	12,7	16,0	20,4	21,2	1.750	0,84
C210 AL	C2052	31,750	9,40	19,05	20,70	22,50	5,08	15,00	2,00	11,0	5,3	25,0	9,6	15,9	16,0	28,5	29,0	2.230	1,27
C212 AL	C2062	38,100	12,57	22,23	25,90	28,50	5,94	18,00	2,50	14,7	6,6	28,0	14,3	21,5	20,7	33,6	35,1	3.180	1,61
C212 AHL	C2062H	38,100	12,57	22,23	29,20	31,50	5,94	18,00	3,25	14,7	6,6	28,0	14,3	21,5	20,7	33,6	35,1	3.800	2,07
C216 AL	C2082	50,800	15,75	28,58	32,70	35,00	7,92	24,00	3,25	19,0	6,8	38,0	19,0	28,0	27,5	40,5	41,6	5.670	3,12
C216 AHL	C2082H	50,800	15,75	28,58	36,20	39,50	7,92	24,00	4,00	19,0	6,8	38,0	19,0	28,0	27,5	40,5	41,6	6.600	3,58
C220 AL	C2102	63,500	18,90	39,67	40,40	45,00	9,53	30,00	4,00	23,4	8,8	47,5	23,8	33,3	31,8	49,2	50,0	8.850	4,83
C220 AHL	C2102H	63,500	18,90	39,67	43,60	46,50	9,53	30,00	5,00	23,4	8,8	47,5	23,8	33,3	31,8	49,2	50,0	10.900	5,38


F

L


OUR CODE	ANSI CHAIN No	Pitch	Width Between Inn. Plates	Roller Ø	Roller Ø	Pin Ø	Plate Depth	Plate Thickness	Extend Pin Ø	Pin Extension	Plate Center Hole Ø	Ultimate Tensile Strength	Weight Per Meter
		p	b1	d3	d4	d1	g	s	dx	v	f	Q	kg
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
C208 A	C2040	25,400	7,85	*7,95		3,96	12,00	1,50	3,96	☆		1.750	0,50
C210 A	C2050	31,750	9,40	*10,16		5,08	15,00	2,00	5,08	☆	7,20	2.230	0,78
C212 A	C2060	38,100	12,57	*11,91		5,94	18,00	2,50	5,94	☆	8,20	3.180	1,12
C212 AH	C2060H	38,100	12,57	*11,91		5,94	18,00	3,25	5,94	☆	8,20	3.800	1,44
C216 A	C2080	50,800	15,75	*15,88		7,92	24,00	3,25	7,92	☆	8,50	5.670	2,08
C216 AH	C2080H	50,800	15,75	*15,88		7,92	24,00	4,00	7,92	☆	8,50	6.600	2,54
C220 A	C2100	63,500	18,90	*19,05		9,53	30,00	4,00	9,53	☆		8.850	3,01
C220 AH	C2100H	63,500	18,90	*19,05		9,53	30,00	5,00	9,53	☆		10.900	3,56
C208 AL	C2042	25,400	7,85		15,88	3,96	12,00	1,50	3,96	☆		1.750	0,84
C210 AL	C2052	31,750	9,40		19,05	5,08	15,00	2,00	5,08	☆	7,20	2.230	1,27
C212 AL	C2062	38,100	12,57		22,23	5,94	18,00	2,50	5,94	☆	8,20	3.180	1,61
C212 AHL	C2062H	38,100	12,57		22,23	5,94	18,00	3,25	5,94	☆	8,20	3.800	2,07
C216 AL	C2082	50,800	15,75		28,58	7,92	24,00	3,25	7,92	☆	8,50	5.670	3,12
C216 AHL	C2082H	50,800	15,75		28,58	7,92	24,00	4,00	7,92	☆	8,50	6.600	3,58
C220 AL	C2102	63,500	18,90		39,67	9,53	30,00	4,00	9,53	☆		8.850	4,83
C220 AHL	C2102H	63,500	18,90		39,67	9,53	30,00	5,00	9,53	☆		10.900	5,38




OUR CODE	PITCH	Width Between Inn. Plates	Roller Ø	Roller Ø	Pin Length	Plate Depth	Plate Thickness	Hollow Pin Ø		Ultimate Tensile Strength	Weight Per Meter
		b1	d3	d4	L1	g	s	Outer Ø	Hole Ø	Q	kg
		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
C 2048	25,40	7,95	* 7,95		16,70	12,00	1,50	5,54	4,10	1.100	0,46
C 2058	31,75	9,53	* 10,16		20,80	15,00	2,00	7,03	5,16	1.780	0,76
C 2068	38,10	12,70	* 11,91		25,90	18,00	2,50	8,33	5,94	2.360	1,02
C 2088	50,80	15,75	* 15,88		32,50	24,00	3,25	11,15	7,97	4.500	1,80
C 2088H	50,80	15,75	* 15,88		36,25	24,00	4,00	11,15	7,97	5.600	1,90
C 2049	25,40	7,95		15,88	16,70	12,00	1,50	5,54	4,10	1.100	0,78
C 2059	31,75	9,53		19,05	20,80	15,00	2,00	7,03	5,16	1.780	1,25
C 2069	38,10	12,70		22,23	25,90	18,00	2,50	8,33	5,94	2.360	1,72
C 2089	50,80	15,75		28,58	32,50	24,00	3,25	11,15	7,97	4.500	2,82
C 2089H	50,80	15,75		28,58	34,25	24,00	4,00	11,15	7,97	5.600	3,10

☆ A richiesta. / ☆ According to request.


* Catena con bussola senza rullo. Il diam. esterno (d3) è il diam. della bussola. / * Bushing chain without roller. The external diameter (d3) is the diameter of the bush.

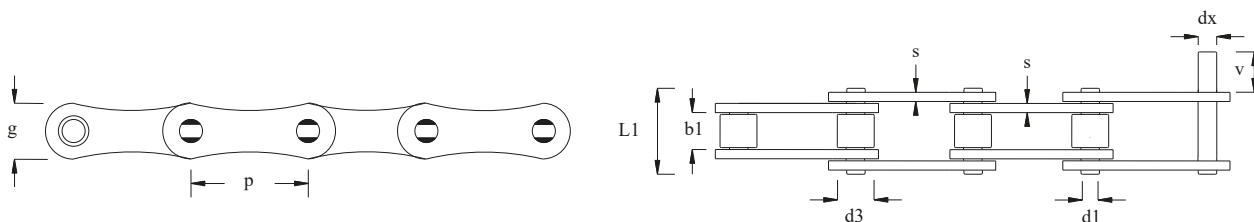


OUR CODE	ANSI CHAIN No	Pitch	Width Between Inn. Plates	Roller Ø	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Extend Pin Ø	Pin Extension	Ultimate Tensile Strength	Weight Per Meter
		p	b1	d3	L1	d1	g	s	dx	v	Q	
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
2040	208 A	25,400	7,85	7,95	16,60	3,96	12,00	1,50	3,96	☆	1.400	0,42
2050	210 A	31,750	9,40	10,16	20,70	5,08	15,00	2,00	5,08	☆	2.200	0,73
2060	212 A	38,100	12,57	11,91	25,90	5,94	18,00	2,42	5,94	☆	3.180	1,02
2080	216 A	50,800	15,75	15,88	32,70	7,92	24,00	3,25	7,92	☆	5.670	1,70
2100	220 A	63,500	18,90	19,05	40,40	9,53	30,00	4,00	9,53	☆	8.850	2,55
OUR CODE	ANSI CHAIN No	Pitch	Width Between Inn. Plates	Roller Ø	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Extend Pin Ø	Pin Extension	Ultimate Tensile Strength	Weight Per Meter
		p	b1	d3	L1	d1	g	s	dx	v	Q	
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
208	208 B	25,400	7,75	8,51	16,70	4,45	11,80	1,60	4,45	☆	1.800	0,45
210	210 B	31,750	9,65	10,16	19,50	5,08	14,70	1,70	5,08	☆	2.240	0,65
212	212 B	38,100	11,68	12,07	22,50	5,72	16,00	1,85	5,72	☆	2.900	0,76
216	216 B	50,800	17,02	15,88	36,10	8,28	21,00	3,00 / 4,00	8,28	☆	6.000	1,75
220	220 B	63,500	19,56	19,05	41,30	10,1	26,40	3,50 / 4,50	10,19	☆	9.500	2,62




A1 K1





A2 K2



M35-1 M1



M35-2 M2



OUR CODE	ANSI CHAIN N°	PITCH	ATTACHMENT A1 - A2 - K1 - K2 - M35/1 - M1 - M35/2 - M2							
		p	h	d	m	a	b	w	b2	w2
		mm	mm	mm	mm	mm	mm	mm	mm	mm
2040	208 A	25,40	☆	☆	☆	☆	☆	☆	☆	☆
2050	210 A	31,75	☆	☆	☆	☆	☆	☆	☆	☆
2060	212 A	38,10	☆	☆	☆	☆	☆	☆	☆	☆
2080	216 A	50,80	☆	☆	☆	☆	☆	☆	☆	☆
2100	220 A	63,50	☆	☆	☆	☆	☆	☆	☆	☆
208	208 B	25,40	☆	☆	☆	☆	☆	☆	☆	☆
210	210 B	31,75	☆	☆	☆	☆	☆	☆	☆	☆
212	212 B	38,10	☆	☆	☆	☆	☆	☆	☆	☆
216	216 B	50,80	☆	☆	☆	☆	☆	☆	☆	☆
220	220 B	63,50	☆	☆	☆	☆	☆	☆	☆	☆

☆ A richiesta.
☆ According to request.