

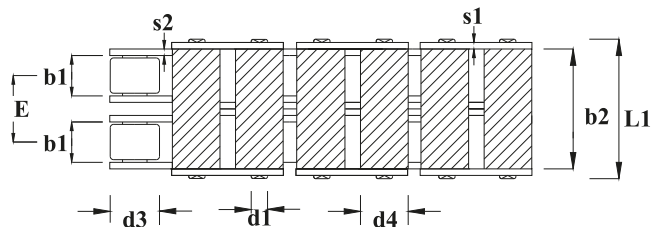
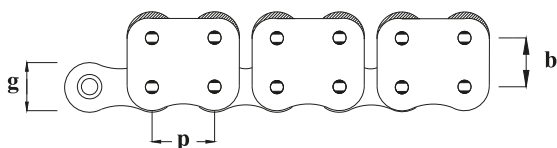


OUR CODE	Pitch	Width Between Inner Plates	Free Roller Space	Roller Ø	Free Roller Ø	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Vertical Pitch	Ultimate Tensile Strength
	p	b1	b2	d3	d4	L1	d1	g	s1/s2	b	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
C06B1AC2	9,525	5,72	8,30	6,35	9,00	13,30	3,28	8,20	1,30	10,10	900
C08B1AC2	12,700	7,75	11,00	8,51	10	16,40	4,45	12,00	1,50	13,00	1.800
C10B1AC2	15,875	9,65	13,70	10,16	13	19,60	5,08	14,40	1,65	16,00	2.200
C12B1AC2	19,050	11,68	15,70	12,07	18,00	22,50	5,72	16,00	1,85	18,50	2.900
C16B1AC2	25,400	17,02	25,50	15,88	22,00	36,10	8,28	21,00	3/4	24,00	6.000

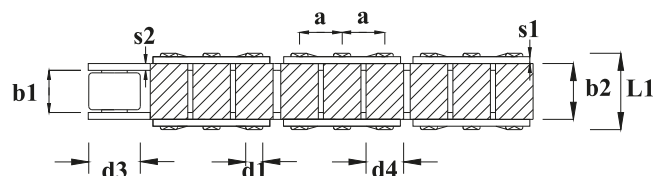

DIN/ISO CHAIN No	Pitch	Width Between Inn. Plates	Free Roller Space	Roller Ø	Free Roller Ø	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Transversal Pitch	Vertical Pitch	Ultimate Tensile Strength
	p	b1	b2	d3	d4	L1	d1	g	s1/s2	E	b	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
C06B2DAC	9,525	5,72	19,80	6,35	9,00	23,40	3,28	8,20	1,30	10,24	10,10	1.690
C08B2DAC	12,700	7,75	26,00	8,51	10,70	31,20	4,45	11,80	1,60	13,92	13,70	3.200
C10B2DAC	15,875	9,65	30,20	10,16	14,00	36,10	5,08	14,70	1,70	16,59	16,50	4.450
C12B2DAC	19,050	11,68	35,20	12,07	18,00	42,00	5,72	16,00	1,85	19,46	18,50	5.780
C16B2DAC	25,400	17,02	57,00	15,88	22,00	68,00	8,28	21,00	3/4	31,88	24,00	10.600

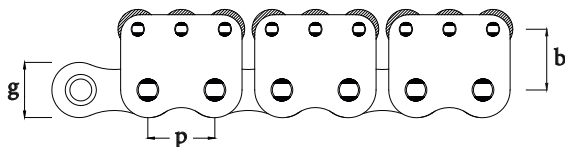

DIN/ISO CHAIN No	Pitch	Width Between Inn. Plates	Free Roller Space	Roller Ø	Free Roller Ø	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Longitudinal Pitch	Vertical Pitch	Ultimate Tensile Strength
	p	b1	b2	d3	d4	L1	d1	g	s1/s2	a	b	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
C12B13AC	19,050	11,68	14,50	12,07	11,00	22,50	5,72	16,00	1,85	12,00	18,50	3.000
C16B13AC	25,400	17,02	24,50	15,88	15,00	36,10	8,28	21,00	3/4	16,50	23,00	6.000
C20B13AC	31,750	19,56	28,00	19,05	20,00	41,30	10,19	26,40	3,5/3,5	21,00	25,00	9.000