



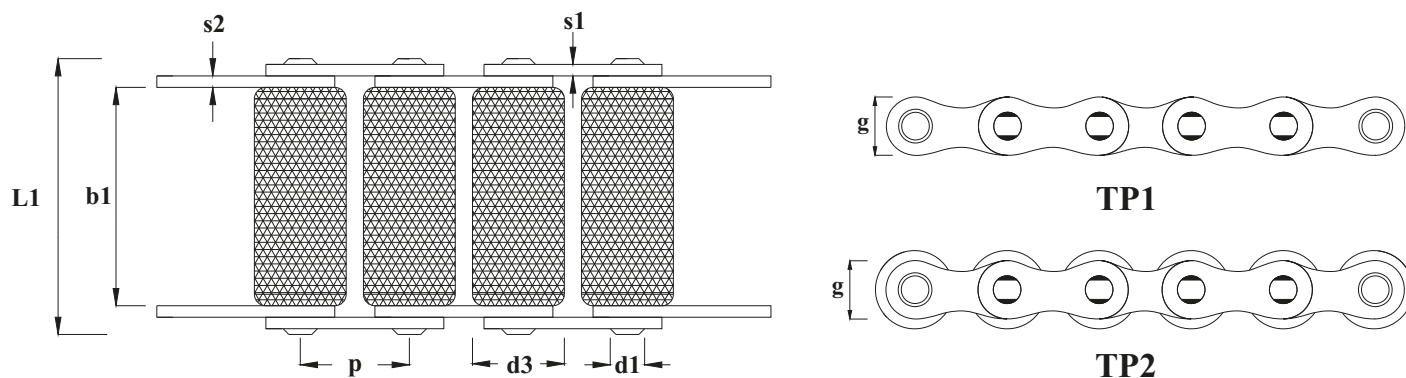

OUR CODE	Pitch	Width Between Inner Plates	Roller Ø	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Ultimate Tensile Strength
	p	b1	d3	L1	d1	g	s1/s2	Q
	mm	mm	mm	mm	mm	mm	mm	kg
C12BTP1	19,050	40,00	12,00	51,40	5,72	16,00	1,85	2.500
C12BTP2	19,050	70,00	18,00	81,50	5,72	16,00	1,85	2.100
C16BTP2	25,400	40,00	24,00	60,00	8,25	21,00	4,00	3.600

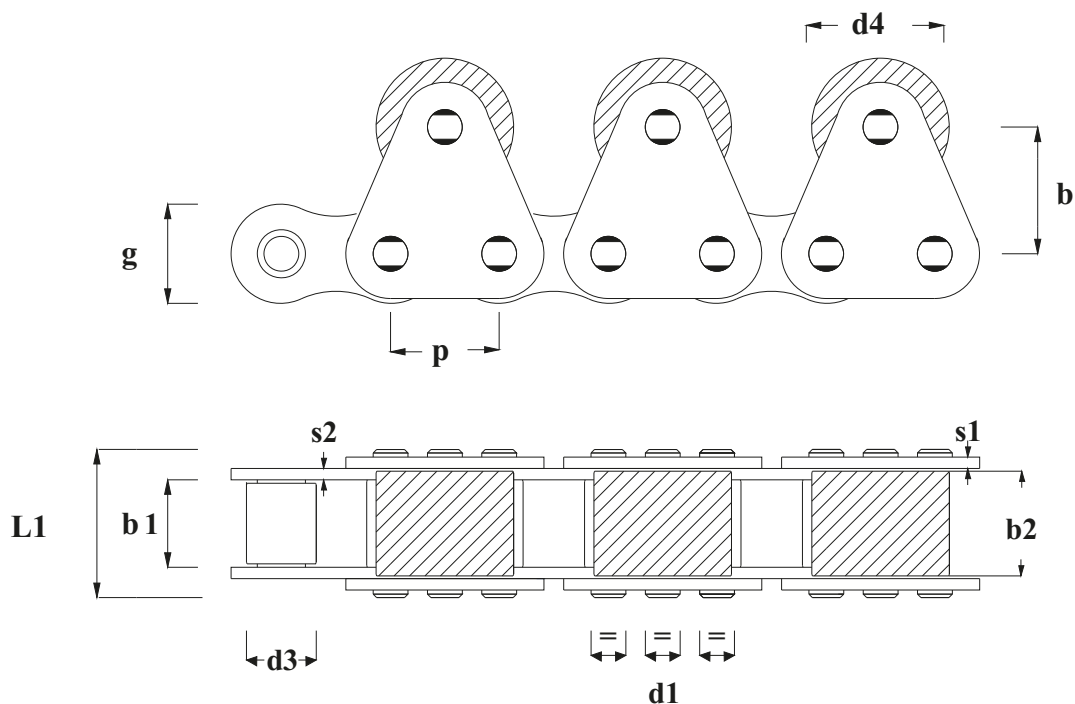

OUR CODE	Pitch	Width Between Inner Plates	Free Roller Space	Roller Ø	Free Roller Ø	Pin Length	Pin Ø	Plate Depth	Plate Thickness	Vertical Pitch	Ultimate Tensile Strength
	p	b1	b2	d3	d4	L1	d1	g	s1/s2	b	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
C06B1AC1	9,525	5,72	11,00	6,35	12,00	13,30	3,28	8,20	1,30	11,00	900
C08B1AC1	12,700	7,75	15,00	8,51	15,00	16,60	4,45	12,00	1,60	15,00	1.800
C10B1AC1	15,875	9,65	19,00	10,16	18,00	19,50	5,08	14,70	1,70	19,00	2.200
C12B1AC1	19,050	11,68	19,50	12,07	20,00	22,50	5,72	16,70	1,85	19,50	2.900
C16B1AC1	25,400	17,02	23,50	15,88	23,00	36,10	8,28	21,00	3 / 4	23,50	6.000