


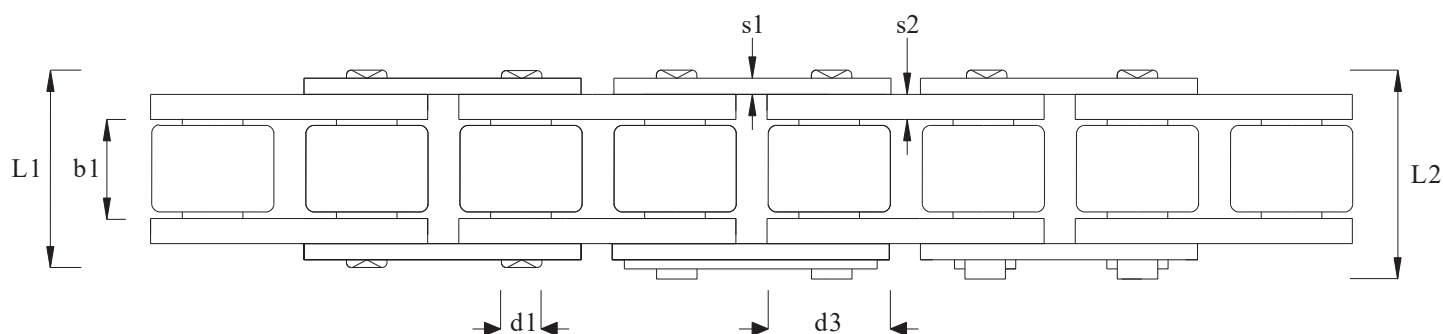
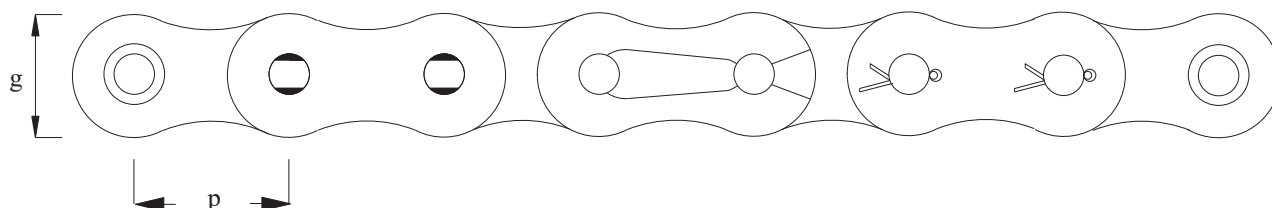


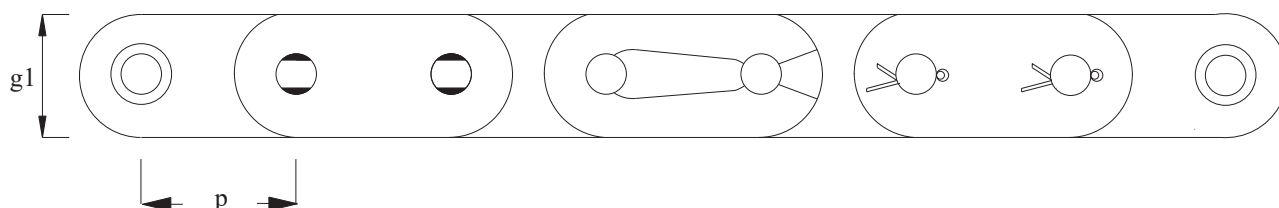

DIN / ISO Chain No	Pitch	Roller Ø	Width Between Inner Plates	Pin Ø	Pin Length		Plate Depth		Plate Thickness		Ultimate Tensile Strength	Weight Per Meter
	p	d3	b1	d1	L1	L2	Eight Shaped	Straight Side	Outer	Inner	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/mt
04 B1	6,000	4,00	2,80	1,85	6,80	7,80	5,00		0,60	0,60	300	0,11
05 B1	8,000	5,00	3,00	2,31	8,20	8,90	7,10		0,80	0,80	500	0,20
06 B1	9,525	6,35	5,72	3,28	13,15	14,10		8,20	1,30	1,30	900	0,41
081	12,700	7,75	3,30	3,66	9,20	12,00	9,90		1,00	1,00	800	0,25
083	12,700	7,75	4,88	3,94	12,90	15,40	10,30		1,30	1,30	1.200	0,45
084	12,700	7,75	4,88	3,94	14,60	17,20	11,15		1,50	1,50	1.500	0,50
08 B1	12,700	8,51	7,75	4,45	16,70	18,20	11,80	11,80	1,60	1,60	1.800	0,69
10 BS	15,875	10,16	6,45	5,08	16,30	18,40	14,70		1,70	1,70	2.240	0,89
10 B1	15,875	10,16	9,65	5,08	19,60	20,90	14,70	14,60	1,70	1,70	2.240	0,93
12 B1	19,050	12,07	11,68	5,72	22,60	24,20	16,00	16,00	1,85	1,85	2.900	1,15
16 B1	25,400	15,88	17,02	8,28	36,10	37,40	21,00	21,00	3,00	4,00	6.000	2,70
20 B1	31,750	19,05	19,56	10,19	41,30	45,00	26,40	26,40	3,50	4,50	9.500	3,70
24 B1	38,100	25,40	25,40	14,63	53,40	57,80	33,20	33,20	5,00	6,00	16.000	7,10
28 B1	44,450	27,94	30,99	15,90	65,10	69,50	36,70	36,70	6,00	7,50	20.000	8,50
32 B1	50,800	29,21	30,99	17,81	66,00	71,00	42,00	42,00	6,00	7,00	25.000	10,25
40 B1	63,500	39,37	38,10	22,89	82,20	89,20	52,96		8,00	8,50	35.500	16,35
48 B1	76,200	48,26	45,72	29,24	99,10	107,00	63,80		10,00	12,00	56.000	25,00

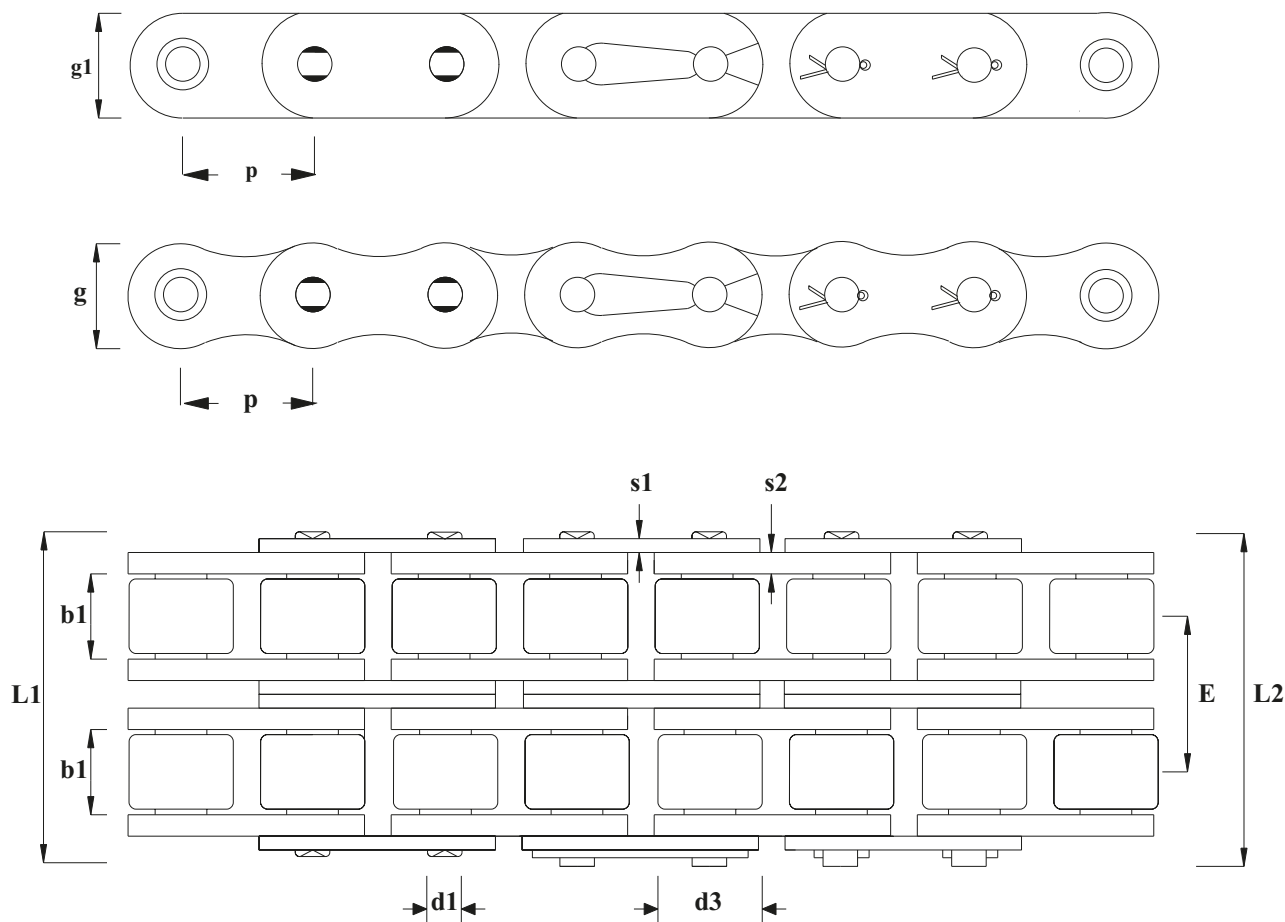

DIN / ISO Chain No	Pitch	Roller Ø	Width Between Inner Plates	Pin Ø	Pin Length		Plate Depth		Plate Thickness		Transversal Pitch	Ultimate Tensile Strength	Weight Per Meter
							Eight Shaped	Straight Side	Outer	Inner			
	p	d3	b1	d1	L1	L2	g	g1	s1	s2	E	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/mt
05 B2	8,000	5,00	3,00	2,31	13,9	14,5	7,10		0,80	0,80	5,64	780	0,33
06 B2	9,525	6,35	5,72	3,28	23,4	24,4	8,20	8,20	1,30	1,30	10,24	1.690	0,77
08 B2	12,700	8,51	7,75	4,45	31,2	32,2	11,80	11,80	1,60	1,60	13,92	3.200	1,34
10 B2	15,875	10,16	9,65	5,08	36,1	37,5	14,70	14,60	1,70	1,70	16,59	4.450	1,84
12 B2	19,050	12,07	11,68	5,72	42,0	43,6	16,00	16,00	1,85	1,85	19,46	5.700	2,31
16 B2	25,400	15,88	17,02	8,28	68,0	69,3	21,00	21,00	3,00	4,00	31,88	10.600	5,42
20 B2	31,750	19,05	19,56	10,19	77,8	81,5	26,40	26,40	3,50	4,50	36,45	17.000	7,20
24 B2	38,100	25,40	25,40	14,63	101,7	106,2	33,20	33,20	5,00	6,00	48,36	28.000	13,40
28 B2	44,450	27,94	30,99	15,90	124,6	129,1	36,70	36,70	6,00	7,50	59,56	36.000	16,60
32 B2	50,800	29,21	30,99	17,81	124,6	129,6	42,00	42,00	6,00	7,00	58,55	45.000	21,00
40 B2	63,500	39,37	38,10	22,89	154,5	161,5	52,96		8,00	8,50	72,29	63.000	32,00
48 B2	76,200	48,26	45,72	29,24	190,4	198,2	63,80		10,00	12,00	91,21	100.000	50,00

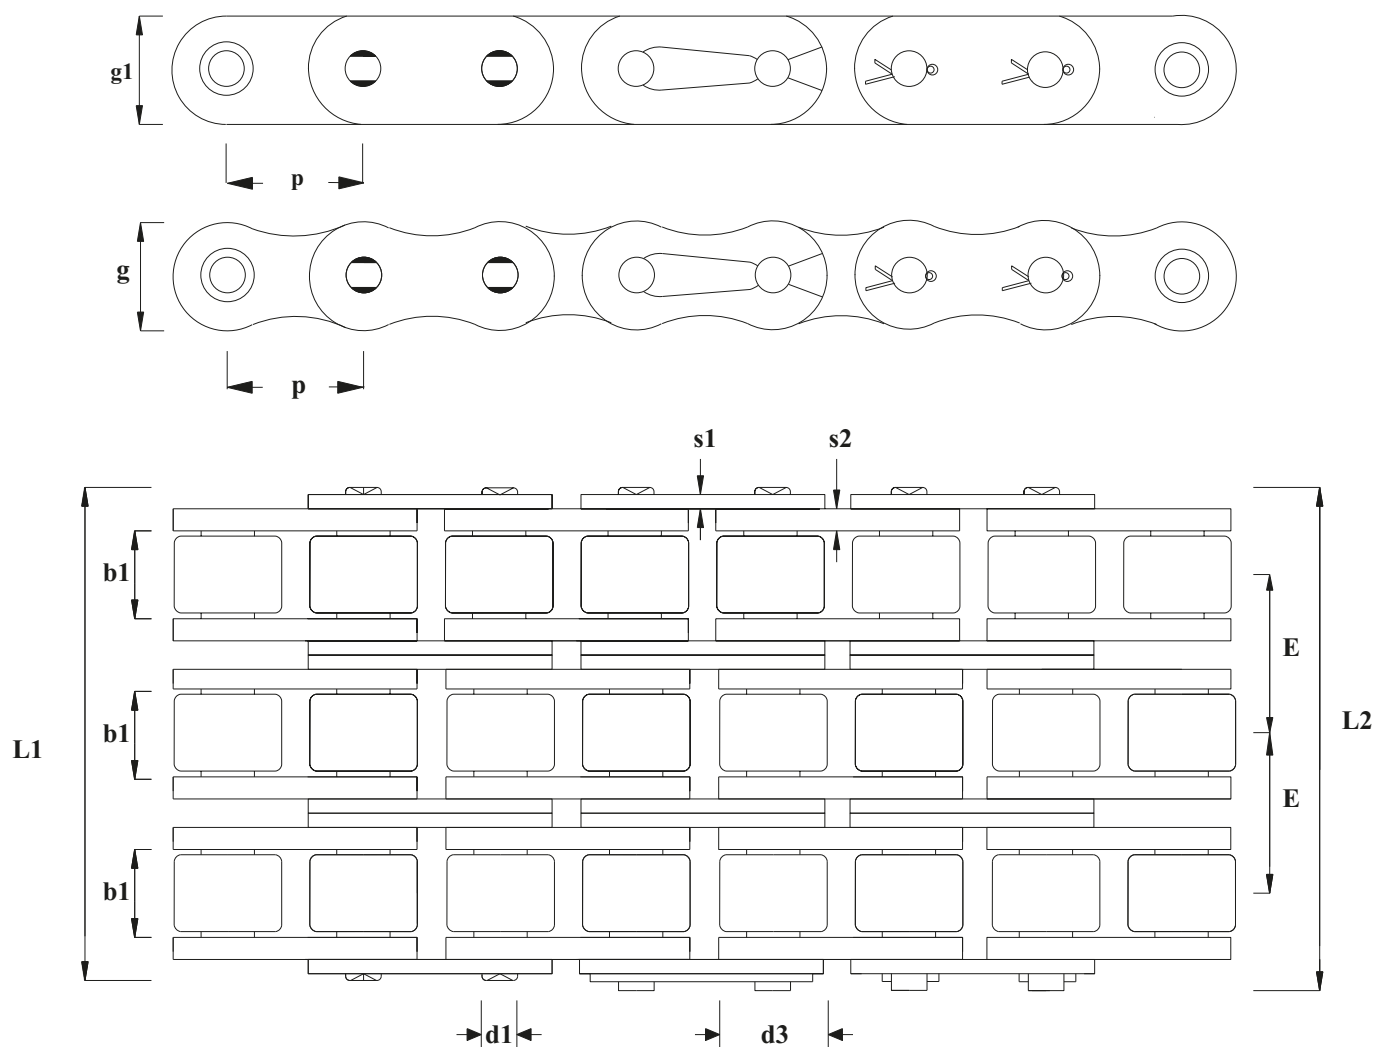

DIN / ISO Chain No	Pitch	Roller Ø	Width Between Inner Plates	Pin Ø	Pin Length		Plate Depth		Plate Thickness		Transversal Pitch	Ultimate Tensile Strength	Weight Per Meter
	p	d3	b1	d1	L1	L2	Eight Shaped	Straight Side	Outer	Inner	E	Q	q
	mm	mm	mm	mm	mm	mm	g	g1	s1	s2	mm	kg	kg/mt
05 B3	8,000	5,00	3,00	2,31	19,5	20,2	7,10		0,80	0,80	5,64	1.110	0,48
06 B3	9,525	6,35	5,72	3,28	33,5	34,6	8,20	8,20	1,30	1,30	10,24	2.490	1,16
08 B3	12,700	8,51	7,75	4,45	45,1	46,1	11,80	11,80	1,60	1,60	13,92	4.750	2,10
10 B3	15,875	10,16	9,65	5,08	52,7	54,1	14,70	14,60	1,70	1,70	16,59	6.670	2,77
12 B3	19,050	12,07	11,68	5,72	61,5	63,1	16,00	16,00	1,85	1,85	19,46	8.700	3,46
16 B3	25,400	15,88	17,02	8,28	99,8	101,2	21,00	21,00	3,00	4,00	31,88	16.000	8,13
20 B3	31,750	19,05	19,56	10,19	114,2	117,9	26,40	26,40	3,50	4,50	36,45	25.000	10,82
24 B3	38,100	25,40	25,40	14,63	150,1	154,6	33,20	33,20	5,00	6,00	48,36	42.500	20,10
28 B3	44,450	27,94	30,99	15,90	184,2	188,7	36,70	36,70	6,00	7,50	59,56	53.000	24,92
32 B3	50,800	29,21	30,99	17,81	183,2	188,2	42,00	42,00	6,00	7,00	58,55	67.000	31,56
40 B3	63,500	39,37	38,10	22,89	226,8	233,8	52,96		8,00	8,50	72,29	95.000	48,10
48 B3	76,200	48,26	45,72	29,24	281,6	289,4	63,80		10,00	12,00	91,21	150.000	75,00